

(1) **CERTIFICATE**

- (2) No. of the Certificate: **ZP/B038/15-PZ**
- (3) Product: **Anchor device type A  
Type: ABS-Lock® V**
- (4) Manufacturer: **ABS Safety GmbH**
- (5) Address: **Gewerbering 4, 47623 Kevelaer, Germany**
- (6) The design of this product and any acceptable variation thereto are specified in the appendix to this certificate.
- (7) The Certification Body of DEKRA EXAM GmbH certifies that this product comply with the requirements of the test regulations listed under item 8 below. The test results are recorded in test report PB 15-061.
- (8) The requirements are assured by compliance with  
**DIN EN 795:2012**
- (9) This certificate relates only to the design and tests of the specified product in accordance to the contemplated requirements. Further requirements applied to the manufacturing process and supply of this product, are not covered by this certificate.
- (10) The manufacturer is authorised to apply the mark of conformity to the products that conform to the types examined.
- (11) This certificate is valid until 25.05.2020.




DEKRA EXAM GmbH  
Bochum, 26.05.2015

signed: Wiegand  
Certification Body

signed: Mühlenbruch  
Special services unit

We confirm the correctness of the translation from the German original. In the case of arbitration only the German wording shall be valid and binding.

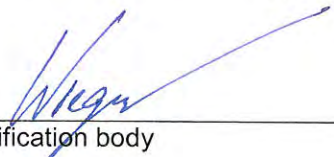  
Certification body

  
Special services unit

(12) Appendix to

(13) **Certificate**  
**ZP/B038/15-PZ**

(14) 14.1 Subject and type  
Anchor device type A  
Type: ABS-Lock® V

14.2 Description

The anchor device of type ABS-Lock V (Fig. 1–2) is used for protecting one person against falls from a height.

The angled sheet is made of corrosion-resistant steel and is 3 mm thick. The sheet width is 40 mm and its length is 60 mm. The drill hole of a diameter of 13 mm is used to accommodate the attachment element as regards to the underground to which the device will be mounted.

The prepared recess is used to accommodate the personal protection equipment against falls from a height by the person using the anchor device.

The anchor device is intended for bearing a load being exerted from all directions.

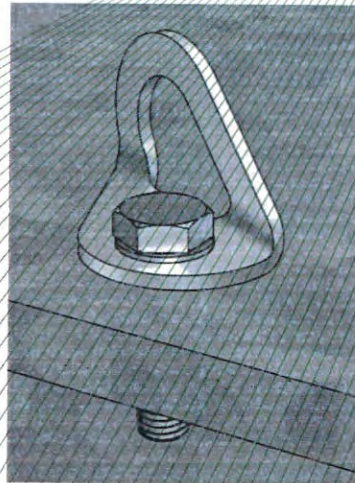
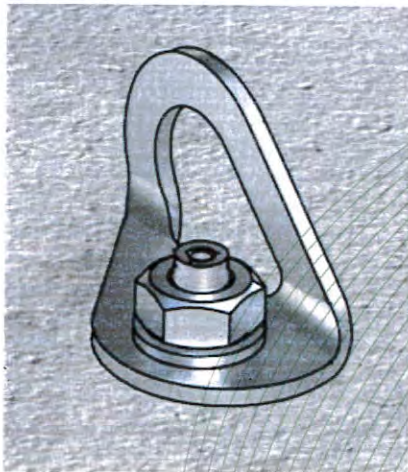


Fig. 1 – 2: Anchor device, type: ABS-Lock® V

(15) Test Report

PB 15-061, 26.05.2015