

(1) Type Examination Certificate

(2) No. of the Type Examination Certificate: **ZP/B063/23**

(3) Product: **Roof safety hook type B**
Type: ABS-Lock® DH-04

(4) Manufacturer: **ABS Safety GmbH**

(5) Address: **Gewerbering 3**
47623 Kevelaer
Germany

(6) The design of this product and any acceptable variation thereto are specified in the schedule to this Type Examination Certificate.

(7) The certification body of DEKRA Testing and Certification GmbH certifies that this product complies with the fundamental requirements of the standard listed under item 8 below. The examination and test results are set out in the report PB 23-089.

(8) The requirements of the standard are assured by compliance with

DIN EN 517:2006

(9) This Type Examination Certificate relates only to the design, examination and tests of the specified product in accordance to the standard list. Further requirements of the Directive apply to the manufacturing process and supply of this personal protective equipment. These are not covered by this certificate.

(10) This Type Test Certificate is valid until 2028-05-29.

DEKRA Testing and Certification GmbH
Bochum, 2023-05-30

signed: Krökel
Managing director

We confirm the correctness of the translation from the German original.
In the case of arbitration only the German wording shall be valid and binding.

Managing director

TRANSLATION

- (11) Appendix to
- (12) **Type Examination Certificate**
ZP/B063/23
- (13) 13.1 Subject and Type
Roof safety hook type B
Type: ABS-Lock® DH-04

13.2 Description

The safety roof hook type B of type ABS-Lock® DH-04 is manufactured in the variants ABS-Lock® DH-04-OG (Fig. 1), ABS-Lock® DH-04-F (Fig. 2), and ABS-Lock® DH-04-BS (Fig. 3) and is used to hook in ladders and as a single anchor point to protect one person against falls from a height.

The safety roof hook consists of one edged sheet ($t = 3 \text{ mm}$). It is mounted to the intended roof construction of inclined roof structures using appropriate screws in each case.

The mounting is done using fastening elements appropriate for the respective roof construction. The two drill holes at the rear of the hook are there to receive the fasteners, the drill hole in the front is there to connect to hook to lightning protection systems. The user connects his own personal protective equipment to the anchor point to protect himself against falls from a height.

The hook base is used to hook in a ladder.

The safety roof hook type B of type ABS-Lock® DH-04-OG and ABS-Lock® DH-04-BS are intended for assembly in a rafter with overlying counter-battens.

Moreover, the safety roof hook type B of type ABS-Lock® DH-04-F is intended for flat roof coverings such as softwood boards or OSB. Then, the edging of the sheet is not necessary.

The safety roof hook is made of corrosion-resistant steel.

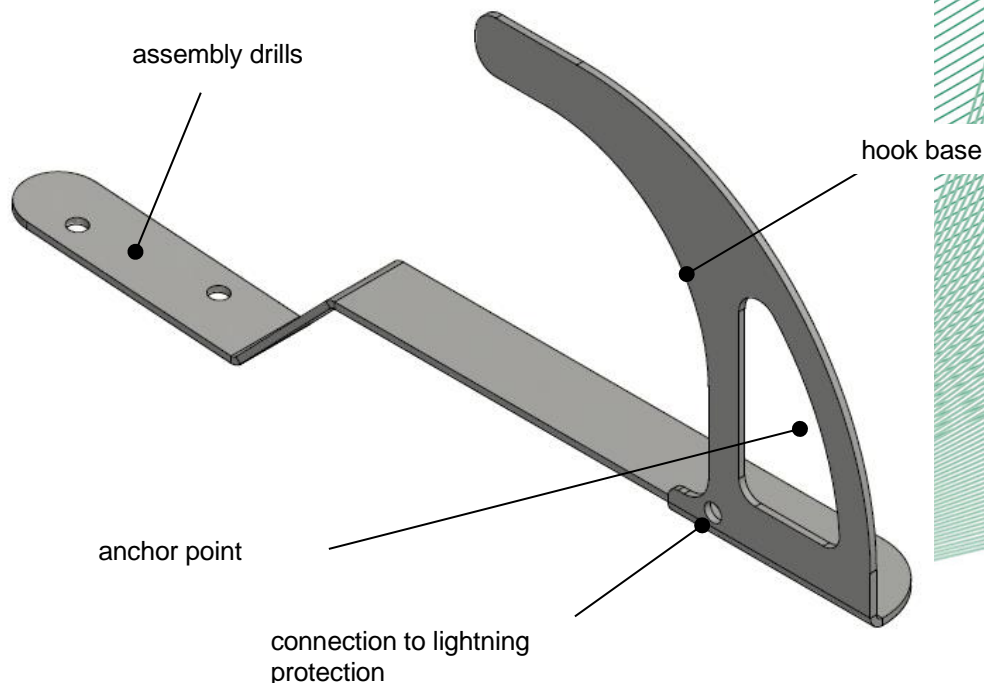


Fig. 1: Safety roof hook type B, type ABS-Lock® DH-04-OG

TRANSLATION

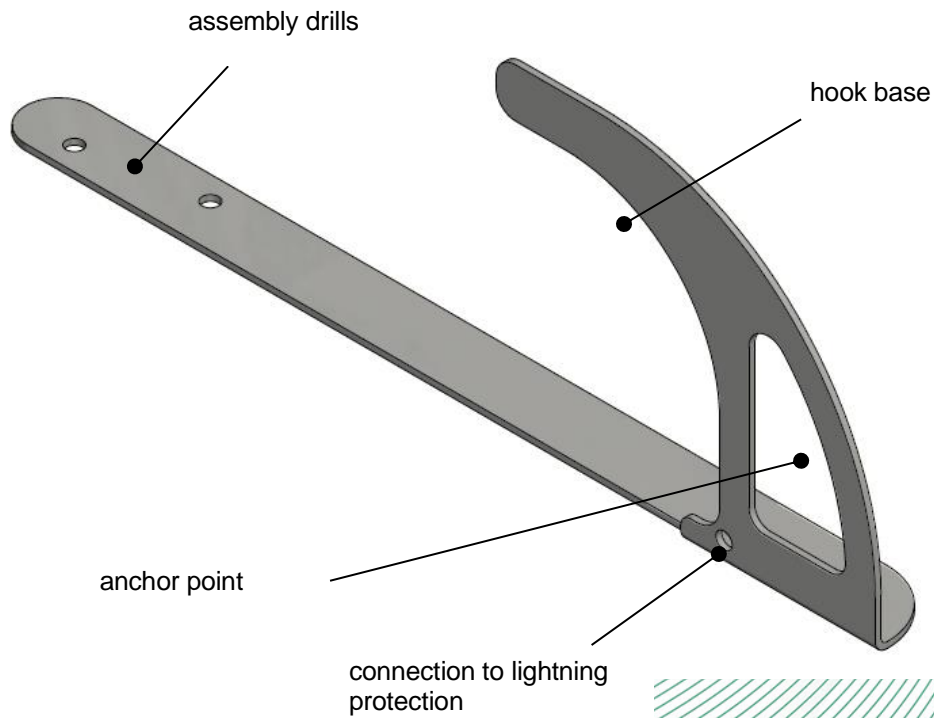


Fig. 2: Safety roof hook type B, type ABS-Lock® DH-04-F

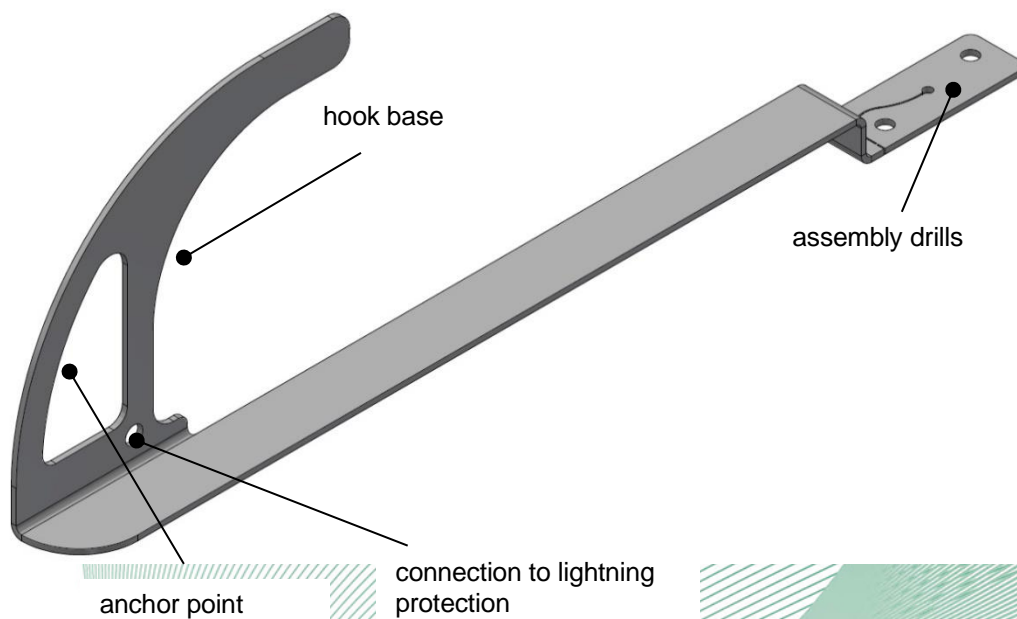


Fig. 3: Safety roof hook type B, type ABS-Lock® DH-04-BS

(14) Report

PB 23-089, dd. 2023-05-17