

(1) Type Examination Certificate

(2) No. of the Type Examination Certificate: **ZP/B152/21**

(3) Product: **Roof safety hook type B**
Type: ABS-Lock® DH06

(4) Manufacturer: **ABS Safety GmbH**

(5) Address: **Gewerbering 3, 47623 Kevelaer, Germany**

(6) The design of this product and any acceptable variation thereto are specified in the schedule to this Type Examination Certificate.

(7) The certification body of DEKRA Testing and Certification GmbH certifies that this product complies with the fundamental requirements of the standard listed under item 8 below. The examination and test results are set out in the report PB 21-140.

(8) The requirements of the standard are assured by compliance with

DIN EN 517:2006


(9) This Type Examination Certificate relates only to the design, examination and tests of the specified product in accordance to the standard list. Further requirements of the Directive apply to the manufacturing process and supply of this personal protective equipment. These are not covered by this certificate.

(10) This Type Test Certificate is valid until 2026-09-26.

DEKRA Testing and Certification GmbH
Bochum, 2021-09-27

signed: Kilisch
Managing director

We confirm the correctness of the translation from the German original.
In the case of arbitration only the German wording shall be valid and binding.


Managing director

TRANSLATION

- (11) Appendix to
- (12) **Type Examination Certificate**
ZP/B152/21
- (13) 13.1 Subject and Type
Roof safety hook type B
Type: ABS-Lock® DH06

13.2 Description

The roof safety hook type B, type: ABS-Lock® DH06 (Fig. 1) is used to hook in ladders and as a single anchor point to secure one person against falls from a height.

The roof safety hook consists of two edged profile halves. After placing on the seam of the respective roof, the two profile halves are screwed together by means of four screws with washers and nuts. The user connects his personal protective equipment to the anchor point to protect himself against falls from a height.

The hook base is intended to hook in a ladder. The roof safety hook is made of corrosion-resistant steel and can be loaded from any direction parallel to the roof surface.

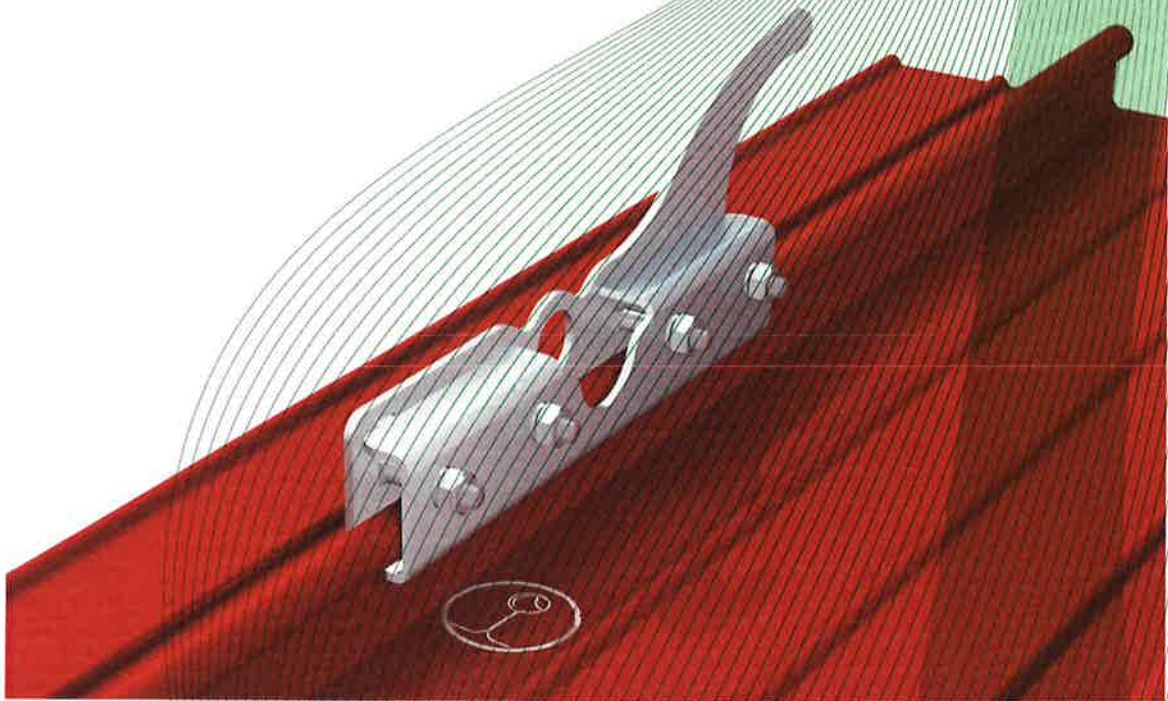


Fig. 1: Safety roof hook, type: ABS-Lock® DH06 (assembly example)

- (14) Report
PB 21-140, 2021-09-27