

(1) **CERTIFICATE**

(2) No. of the Certificate: **ZP/B041/22-PZ** replaces ZP/B040/21-PZ

(3) Product: **Anchor device type E**
Type: ABS-Lock OnTop Weight

(4) Manufacturer: **ABS Safety GmbH**

(5) Address: **Gewerbering 3**
47623 Kevelaer

(6) The design of this product and any acceptable variation thereto are specified in the appendix to this certificate.

(7) The Certification Body of DEKRA Testing and Certification GmbH certifies that this product complies with the requirements of the test regulations listed under item 8 below. The test results are recorded in report PB 22-046.

(8) The requirements are assured by compliance with
DIN EN 795:2012

(9) This certificate relates only to the design and tests of the specified product in accordance to the contemplated requirements. Further requirements applied to the manufacturing process and supply of this product, are not covered by this certificate.

(10) The manufacturer is authorised to apply the mark of conformity to the products that conform to the types examined.

(11) This certificate is valid until 2027-03-02.



DEKRA Testing and Certification GmbH
Bochum, 2022-03-03

Signed: Kilisch

Managing director

We confirm the correctness of the translation from the German original.
In the case of arbitration only the German wording shall be valid and binding.



Managing director

TRANSLATION

- (12) Appendix to
- (13) **Certificate**
ZP/B041/22-PZ
- (14) 14.1 Subject and type
Anchor device type E
Type: ABS-Lock® OnTop Weight

14.2 Description

The anchor device of type ABS-Lock® OnTop Weight (Fig. 1-2) is used for the protection of one person against falls from a height and intended for a permanent assembly on the structure surface secured by weights. The weights are made of gravel and attached to a carrying layer made of fleece. The size of the carrying layer is 3 m x 3 m. Suitable assembly surfaces are even surfaces made of foil or bitumen. The anchor device consists of a square base plate (150 mm x 150 mm) with four drill holes (M8). Centrally a support (Ø 16 mm) is welded which is 345 mm high. Four bars, each 48.3 mm wide and 1015 mm long, are screw-fastened to the base plate. The anchor device is made of corrosion-resistant material and designed to bear loads exerted from any direction parallel to the structure surface.

If the anchor device of type ABS-Lock® OnTop Weight is used as a single anchor point, the carrying layer is weighted with 750 kg; if the anchor device is used in combination with the ABS-Lock® SYS wire rope system (Ø 6 mm), it is weighted with 1300 kg. It is possible to erect superstructures of max. 7.5 m field size.

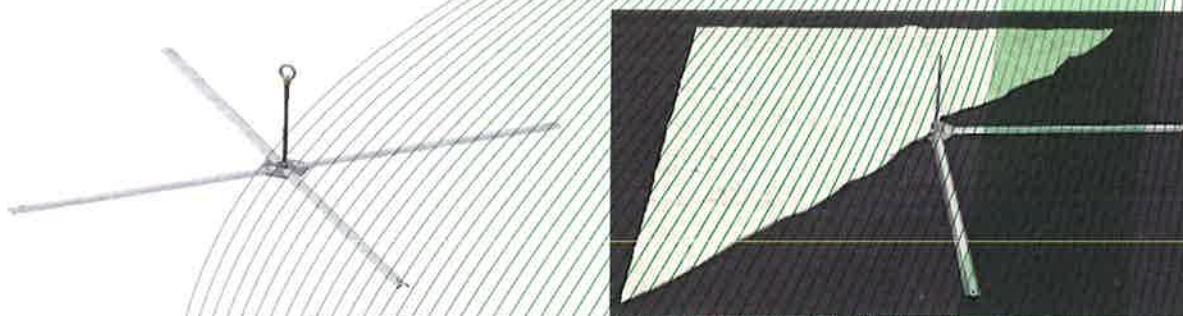


Fig. 1-2: Anchor device of type ABS-Lock® OnTop Weight, base structure without carrying layer (left) and with carrying layer made of fleece, but without weights (right)

- (15) Report
PB 22-046, 2022-03-03