

(1) CERTIFICATE

(2) No. of the Certificate: **ZP/B133/20-PZ** replaces ZP/B094/15-PZ

(3) Product: **Anchor device type A**
Type: ABS-Lock® VI

(4) Manufacturer: **ABS Safety GmbH**

(5) Address: **Gewerbering 3**
47623 Kevelaer
Germany

(6) The design of this product and any acceptable variation thereto are specified in the appendix to this certificate.

(7) The Certification Body of DEKRA Testing and Certification GmbH certifies that this product complies with the requirements of the test regulations listed under item 8 below. The test results are recorded in report PB 20-039.

(8) The requirements are assured by compliance with

DIN EN 795:2012

(9) This certificate relates only to the design and tests of the specified product in accordance to the contemplated requirements. Further requirements applied to the manufacturing process and supply of this product, are not covered by this certificate.

(10) The manufacturer is authorised to apply the mark of conformity to the products that conform to the types examined.

(11) This certificate is valid until 2025-08-17.



DEKRA Testing and Certification GmbH
Bochum, 2020-08-18

Signed: Kilisch
Managing director

We confirm the correctness of the translation from the German original.
In the case of arbitration only the German wording shall be valid and binding.

A handwritten signature in blue ink, appearing to be 'J. Kilisch', written over a horizontal line.

Managing director

TRANSLATION

- (12) Appendix to
- (13) **Certificate**
ZP/B133/20-PZ
- (14) 14.1 Subject and type
Anchor device type A
Type: ABS-Lock® VI

14.2 Description

The anchor device of type ABS-Lock® VI (Fig. 1) is used as a single anchor point to secure maximum one person against falls from a height. It is intended for assembly to surfaces of steel or concrete. The anchor device consists of a toggle fastener with an M8 threaded bolt. At the top end of the threaded bolt, a plate (Ø 48 mm) and a ring-shaped eyelet are mounted. The user connects his own PPE to this eyelet to protect himself against falls from a height. V can be loaded from any direction and is made of corrosion-resistant material.

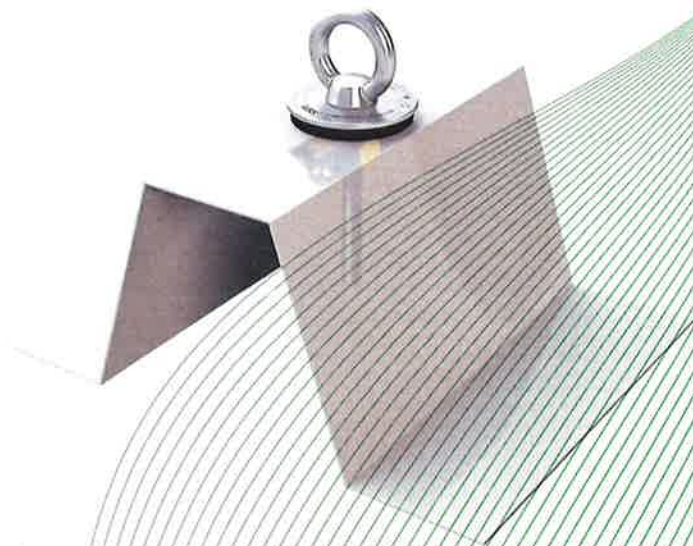


Fig. 1: Anchor device, type: ABS-Lock® VI (assembly example)

- (15) Report
PB 20-039, 2020-08-18