

# (1) CERTIFICATE

- (2) No. of the Certificate: **ZP/B131/18-PZ**
- (3) Product: **Anchor device type A**  
**Type: ABS-Lock® X-H-16**
- (4) Manufacturer: **ABS Safety GmbH**
- (5) Address: **Gewerbering 3, 47623 Kevelaer, Germany**
- (6) The design of this product and any acceptable variation thereto are specified in the appendix to this certificate.
- (7) The Certification Body of DEKRA EXAM GmbH certifies that this product comply with the requirements of the test regulations listed under item 8 below. The test results are recorded in test report PB 17-316.
- (8) The requirements are assured by compliance with  
**DIN EN 795:2012** **DIN CEN/TS 16415:2017**
- (9) This certificate relates only to the design and tests of the specified product in accordance to the contemplated requirements. Further requirements applied to the manufacturing process and supply of this product, are not covered by this certificate.
- (10) The manufacturer is authorised to apply the mark of conformity to the products that conform to the types examined.
- (11) This certificate is valid until 2023-05-23.



DEKRA EXAM GmbH  
Bochum, 2018-05-24

Signed: Koch  
Certification Body

Signed: Mühlenbruch  
Special services unit

We confirm the correctness of the translation from the German original.  
In the case of arbitration only the German wording shall be valid and binding.

  
Certification body

  
Special services unit

## TRANSLATION

- (12) Appendix to
- (13) **Certificate**  
**ZP/B131/18-PZ**
- (14) 14.1 Subject and type  
Anchor device type A  
Type: ABS-Lock<sup>®</sup> X-H-16

### 14.2 Description

The anchor device, type: ABS-Lock<sup>®</sup> X-H-16 (fig. 1) is used to protect a maximum number of three persons against falls from a height and is intended for mounting on wood surfaces by means of round headed wood screws 6 x 60 mm. In addition, the mounting on softwood boards (t= 24 mm) or on OSB (t = 18 mm) is possible.

The anchor device consists of a rectangular base plate (200 mm x 200 mm) with 16 holes. These holes are used to hold the fastening elements. Centrally welded to the plate there is a support made of round steel. The support is between 300 mm and 1000 mm high and has a diameter of 16 mm. A sleeve is mounted to the lower end of the support. Both components are made of corrosion resistant steel.

The anchor device is intended for load from any direction parallel to the building surface.

At the top end of the support there is a ring-shaped eyelet securely screw-fastened with a locknut.

The user can protect himself against falls from a height by connecting his personal protective equipment to the eyelet.

Instead of the ring-shaped eyelet the mounting of anchor line components of types ABS-Lock<sup>®</sup> SYS I to SYS IV of ABS Safety GmbH is also possible. In those variants the anchor device serves as an end or intermediate anchor of the mentioned wire-rope systems.

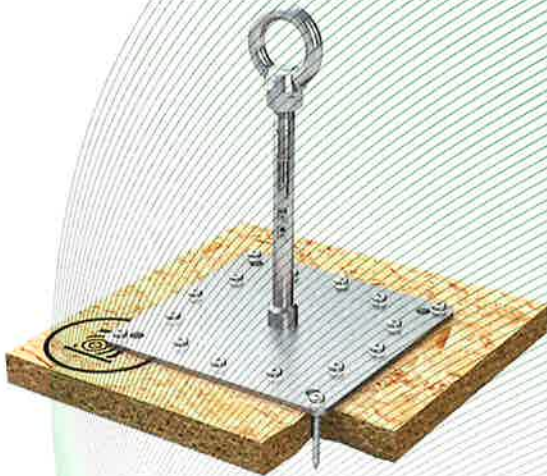


Fig. 1: Anchor device, type: ABS-Lock<sup>®</sup> X-H-16

- (15) Test Report

PB 17-316 dd. 2018-05-24