

(1) CERTIFICATE

- (2) No. of the Certificate: **ZP/B262/15-PZ R1**
- (3) Product: **Anchor device type A
Type: ABS-Lock® X-H-4**
- (4) Manufacturer: **ABS Safety GmbH**
- (5) Address: **Gewerbering 3, 47623 Kevelaer, Germany**
- (6) The design of this product and any acceptable variation thereto are specified in the appendix to this certificate.
- (7) The Certification Body of DEKRA EXAM GmbH certifies that this product comply with the requirements of the test regulations listed under item 8 below. The test results are recorded in test report PB 17-296.
- (8) The requirements are assured by compliance with
DIN EN 795:2012 DIN CEN/TS 16415:2013
- (9) This certificate relates only to the design and tests of the specified product in accordance to the contemplated requirements. Further requirements applied to the manufacturing process and supply of this product, are not covered by this certificate.
- (10) The manufacturer is authorized to apply the mark of conformity to the products that conform to the types examined.
- (11) This certificate is valid until 2022-11-05.

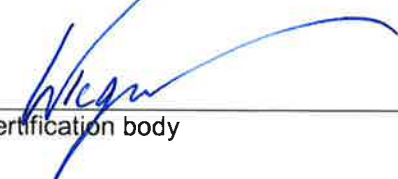


DEKRA EXAM GmbH
Bochum, 2018-01-09

Signed: Wiegand
Certification Body

Signed: Mühlenbruch
Special services unit

We confirm the correctness of the translation from the German original.
In the case of arbitration only the German wording shall be valid and binding.


Certification body


Special services unit

(12) Appendix to

(13) **Certificate**
ZP/B262/15-PZ R1

(14) 14.1 Subject and type
Anchor device type A
Type: ABS-Lock® X-H-4

14.2 Description

The anchor device, type ABS-Lock® X-H-4 (fig. 1) is used to protect a maximum number of three persons against falls from a height. It is to be mounted on wooden beams. The minimum beam width is 100 mm and the minimum beam height is 120 mm.

The anchor device is fastened by four drill holes (Ø 11 mm) in the base plate.

Four wooden screws (Ø 6.5 mm) are used as connectors. The necessary screw-in depth is 100 mm.

The dimensions of the base plate are 100 mm x 100 mm x 5 mm. Centrally welded onto the base plate is a support made of round steel (Ø 16 mm) with a height of 150 mm to 800 mm.

The lower end of the support is surrounded by a sleeve.

At the top end of the support there is a ring-shaped eyelet securely screw-fastened.

The users can protect themselves against falls from a height by connecting their own personal protective equipment to the eyelet. It consists of corrosion-resistant steel. Instead of the ring-shaped eyelet the mounting of line rails for wire rope systems of types ABS-Lock® SYS I to SYS IV is also possible.

In this variant the anchor device serves as an end or intermediate anchor point of wire-rope systems of type C according to DIN EN 795:2012 with a permitted maximum force applied of 14 kN. The anchor device is intended for load from any direction.



Fig. 1: Anchor device, type: ABS-Lock® X-H-4

(15) Test Report

PB 17-296 dd. 2017-11-06