

(1) CERTIFICATE

- (2) No. of the Certificate: **ZP/B122/18-PZ**
- (3) Product: **Anchor device type A
Type: ABS-Lock® X-T-One**
- (4) Manufacturer: **ABS Safety GmbH**
- (5) Address: **Gewerbering 3, 47623 Kevelaer, Germany**
- (6) The design of this product and any acceptable variation thereto are specified in the appendix to this certificate.
- (7) The Certification Body of DEKRA EXAM GmbH certifies that this product comply with the requirements of the test regulations listed under item 8 below. The test results are recorded in test report PB 18-121.
- (8) The requirements are assured by compliance with
DIN EN 795:2012 DIN CEN/TS 16415:2017
- (9) This certificate relates only to the design and tests of the specified product in accordance to the contemplated requirements. Further requirements applied to the manufacturing process and supply of this product, are not covered by this certificate.
- (10) The manufacturer is authorized to apply the mark of conformity to the products that conform to the types examined.
- (11) This certificate is valid until 2023-06-13.



DEKRA EXAM GmbH
Bochum, 2018-06-14

Signed: Wiegand
Certification Body

Signed: Mühlenbruch
Special services unit

We confirm the correctness of the translation from the German original.
In the case of arbitration only the German wording shall be valid and binding.


Certification body


Special services unit

TRANSLATION

- (12) Appendix to
- (13) **Certificate**
ZP/B122/18-PZ
- (14) 14.1 Subject and type
Anchor device type A
Type: ABS-Lock® X-T-One

14.2 Description

The anchor device serves to protect a maximum of three persons against falls from a height and is intended to be mounted on trapezoidal sheeting roofs with overlying insulation. The support height of the anchor device is 250 mm to 800mm.

The fastening of the anchor device is being realized by a skip hoist mechanism and a continuous threaded rod which is mounted through a previously created bore.

There is a stiffening tube attached above the threaded rod. The upper end of the anchor device is equipped with a ring-shaped eyelet M16 that is screwed secured by a hexagonal nut.

The user can connect to the eyelet using his PPE to secure himself against falls from a height. The anchor device consists of corrosion-resistant steel and is intended for bearing load exerted from any direction parallel to the building surface.

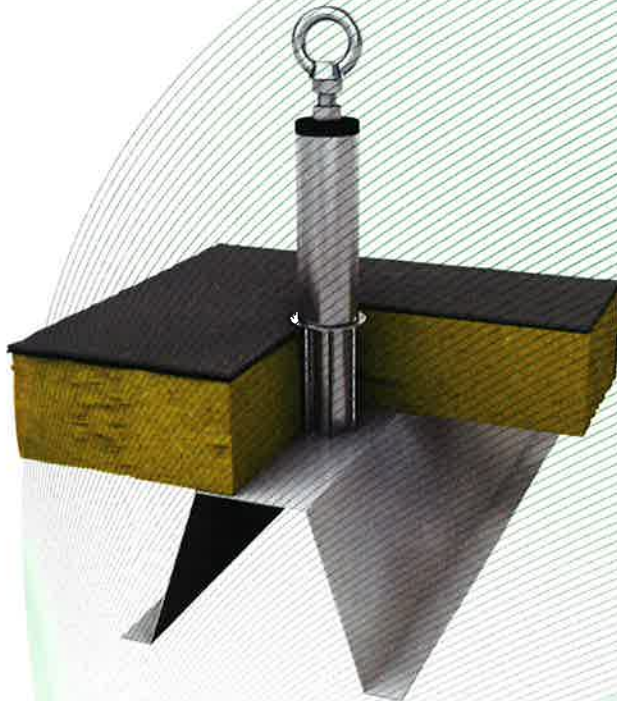


Fig. 1: Anchor device, type: ABS-Lock® X-T-One

- (15) Test Report

PB 18-121 dd. 2018-06-13