

(1) Type Examination Certificate

(2) No. of the Type Examination Certificate: **ZP/B120/20**

(3) Product: **Fall-through protection**
Type: **ABS DomeWeb**

(4) Manufacturer: **ABS Safety GmbH**

(5) Address: **Gewerbering 3, 47623 Kevelaer**

(6) The design of this product and any acceptable variation thereto are specified in the schedule to this Type Examination Certificate.

(7) The certification body of DEKRA Testing and Certification GmbH certifies that this product complies with the fundamental requirements of the standard listed under item 8 below. The examination and test results are set out in the report PB 20-043.

(8) The requirements of the standard are assured by compliance with

GS-Bau-18 Ausgabe 2015


(9) This Type Examination Certificate relates only to the design, examination and tests of the specified product in accordance to the standard list. Further requirements of the Directive apply to the manufacturing process and supply of this personal protective equipment. These are not covered by this certificate.

(10) This Type Test Certificate is valid until 2025-08-03.

DEKRA Testing and Certification GmbH
Bochum, 2020-08-04

signed: Kilisch
Managing director

We confirm the correctness of the translation from the German original.
In the case of arbitration only the German wording shall be valid and binding.


Managing director

TRANSLATION

- (11) Appendix to
- (12) **Type Examination Certificate**
ZP/B120/20
- (13) 13.1 Subject and Type
Fall-through protection
Type: ABS DomeWeb

13.2 Description

The anchor device with fall-through protection type: ABS DomeWeb is used to temporarily protect people against falling. When using, a maximum of one person can be secured to the anchor line made of webbing. The system is installed horizontally on rooflights with sufficient load-bearing capacity.

The fall protection is specially designed to protect a person in the event of a fall through a rooflight. In addition, the person can be rescued by another person.

The fall-through protection consists of a network with dimensions of 2.0 m x 2.0 m up to 3.0 m x 3.0 m.

The system is installed on the rim of the rooflight using a webbing with a tensioning element. The webbing is looped through the mesh and fixed to the mesh with additional loops.

On the webbing, the user can directly secure himself against falling with a connecting element and his additional PPE against falls from a height.

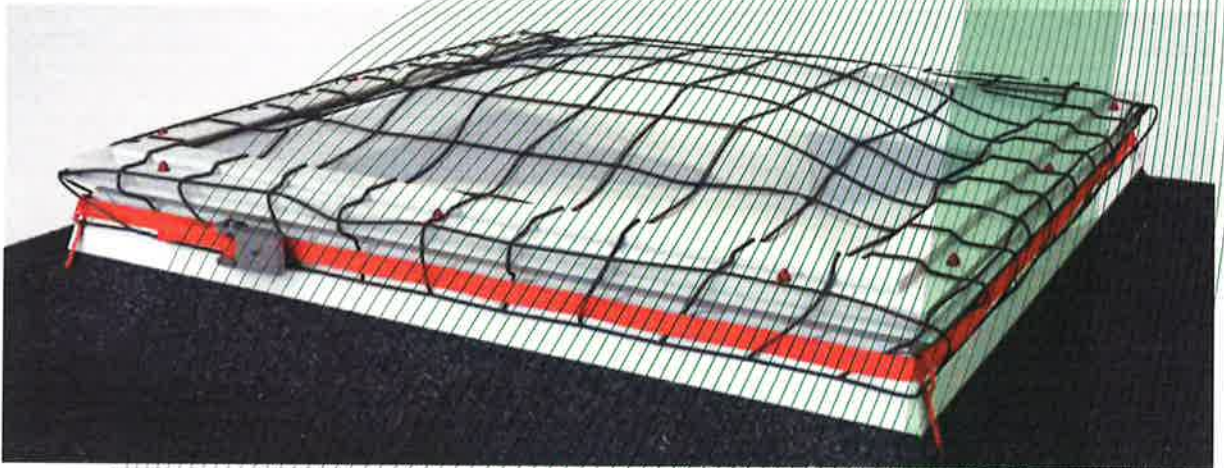


Fig.: Anchor device with fall-through protection, type: ABS DomeWeb

- (14) Report

PB 20-043 dd. 2020-08-04