

ABS-LockSeal Extension

Shrink tubing (Ø 16 and Ø 42 mm) - designed to extend a sealant collar





Our ABS-LockSeal Extension shrink tubing is used to extend an ABS-LockSeal sealant collar, e.g. for usage on an inverted roof. It can be individually shortened onsite and is suitable for supports / anchorage points with a diameter of Ø 16 mm and Ø 42 mm. Our ABS-LockSeal Extension is available in 3 different lengths (300, 600 and 1200 mm).

All you need to shrink the tubing is a source of heat (e.g. a hot air gun). Once you have added the shrink tubing, it shrinks around the support and sealant collar when heated up, thus ensuring that your system is completely waterproof and preventing dampness from seeping into your building structure.

- Extension for ABS LockSeal sealant collars
- Designed for Ø 16 mm posts
- Available in 3 different lengths: 300, 600 and 1200 mm
- Simply shorten the tubing to the required length



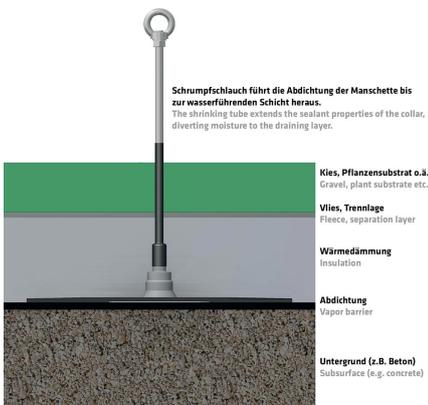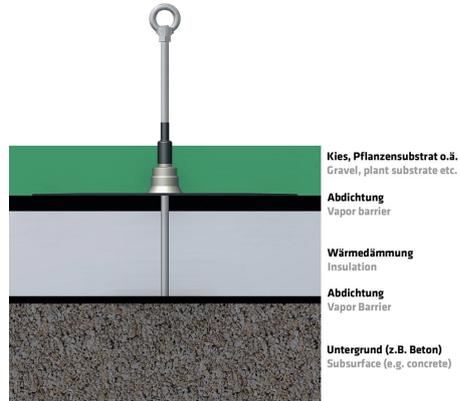

ABS-LockSeal Bitu & Bitu-S

Sealant collar for fall protection anchors installed on a bitumen roof surface (Ø 16, 24, 42 mm)



ABS-LockSeal Basic

Sealant collar for anchorage points (Ø 16 und 42 mm) - specially designed for cold-bonding



ABS-LockSeal Plastic

Sealant collar for anchorage points (Ø 16, 24 and 42 mm) - specially designed for PVC, PP and PE roof surfaces



Gewerbering 3 · D-47623 Kevelaer
ABS Safety GmbH



fon: +49 2832 – 97281-0
fax: +49 2832 – 97281-29



info@absturzschutz.de
www.absturzschutz.de