ABS-Lock II-B

Matching sleeve to our ABS-Lock I - designed for installation in concrete and wooden surfaces

Certification
DIBt Approval | Ü-Sign DIN EN 795
ANSI

Force Directions
Lateral and Axial Lateral

Substructure
Wood Concrete

Max. no. of users
Two Persons

Miscellaneous
Stainless Steel

Attachment
embedded screwed

Application
Window Facade/ Wall
Overhead

Our stainless steel ABS-Lock II-B sleeve is the counterpart to our detachable ABS-Lock I anchor. This sleeve is available in a variety of different lengths and can either be cemented into a concrete structure or screwed into wood. A range of angular tabs let you easily install our ABS-Lock II-B in a suspended ceiling. This makes this system the perfect fall arrest partner for securing your windows. The sleeve lies flush with the ceiling so that it does not spoil the aesthetic look of your room.

This system is the ideal solution in a window situation. The anchorage eyelet is detachable so that it does not stop you opening the window. This anchor never gets in your way. And simply grab hold of an ABS-Lock I TelePole telescopic rod to easily and safely reach your detachable anchorage eyelet - even in awkward places.

Our ABS-Lock II-B is supplied with a plug to protect it during plastering work as well as a plastic cap. For a particularly high-class look, we also supply an optional stainless steel cap: "ABS-Lock II Steel Cover".

- National technical approval ("abZ"): Z-14.9-688
  (pls. observe the installation instructions stated in the "abZ")
- Ü symbol
- EN 795:2012, B + CEN/TS 16415:2013
- Concrete ? C20/25
- Wood (min. rafter dimensions: 140mm x 140mm)
- IMPORTANT: Axial loads may only be applied in wood installations when countered!!

Gewerbering 3 · D-47623 Kevelaer
ABS Safety GmbH

fon: +49 2832 – 97281-0
fax: +49 2832 – 97281-29

info@absturzsicherung.de
www.absturzsicherung.de

Accessories / Components

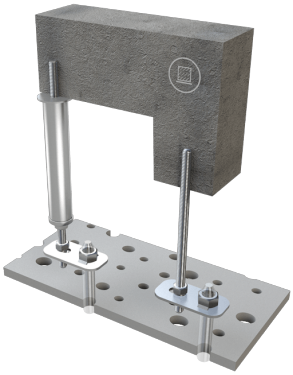

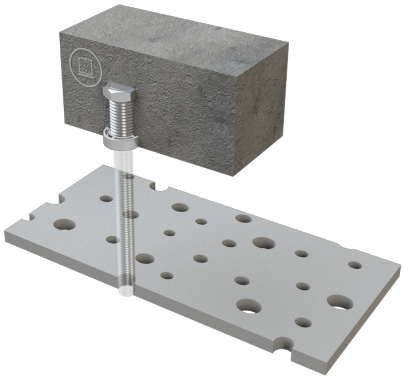

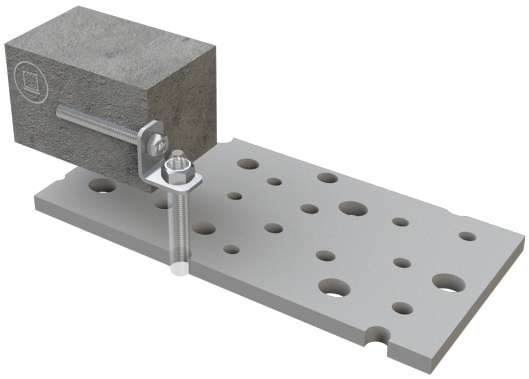

Accessories / Components

ABS-Lock II Steel Cover
Stainless steel protective cap for our ABS-Lock I+II anchorage solution

ABS-Lock I
Detachable anchor for ABS-Lock II sleeve

Special Adhesive WIT-VM-250
Special Adhesive for concrete and masonry

Cartridge applicator gun WIT
Designed for Special Adhesive WIT-VM-250

ABS-Lock I TelePole
Telescopic rod for inserting and removing an ABS-Lock I anchor

Gewerbering 3 · D-47623 Kevelaer
ABS Safety GmbH

fon: +49 2832 – 97281-0
fax: +49 2832 – 97281-29

info@absturzsicherung.de
www.absturzsicherung.de