


ABS-Lock SYS - Facades / Walls

Traversable lifeline systems: ABS-Lock SYS II (8 mm) & IV (6 mm) -
specially designed for facades

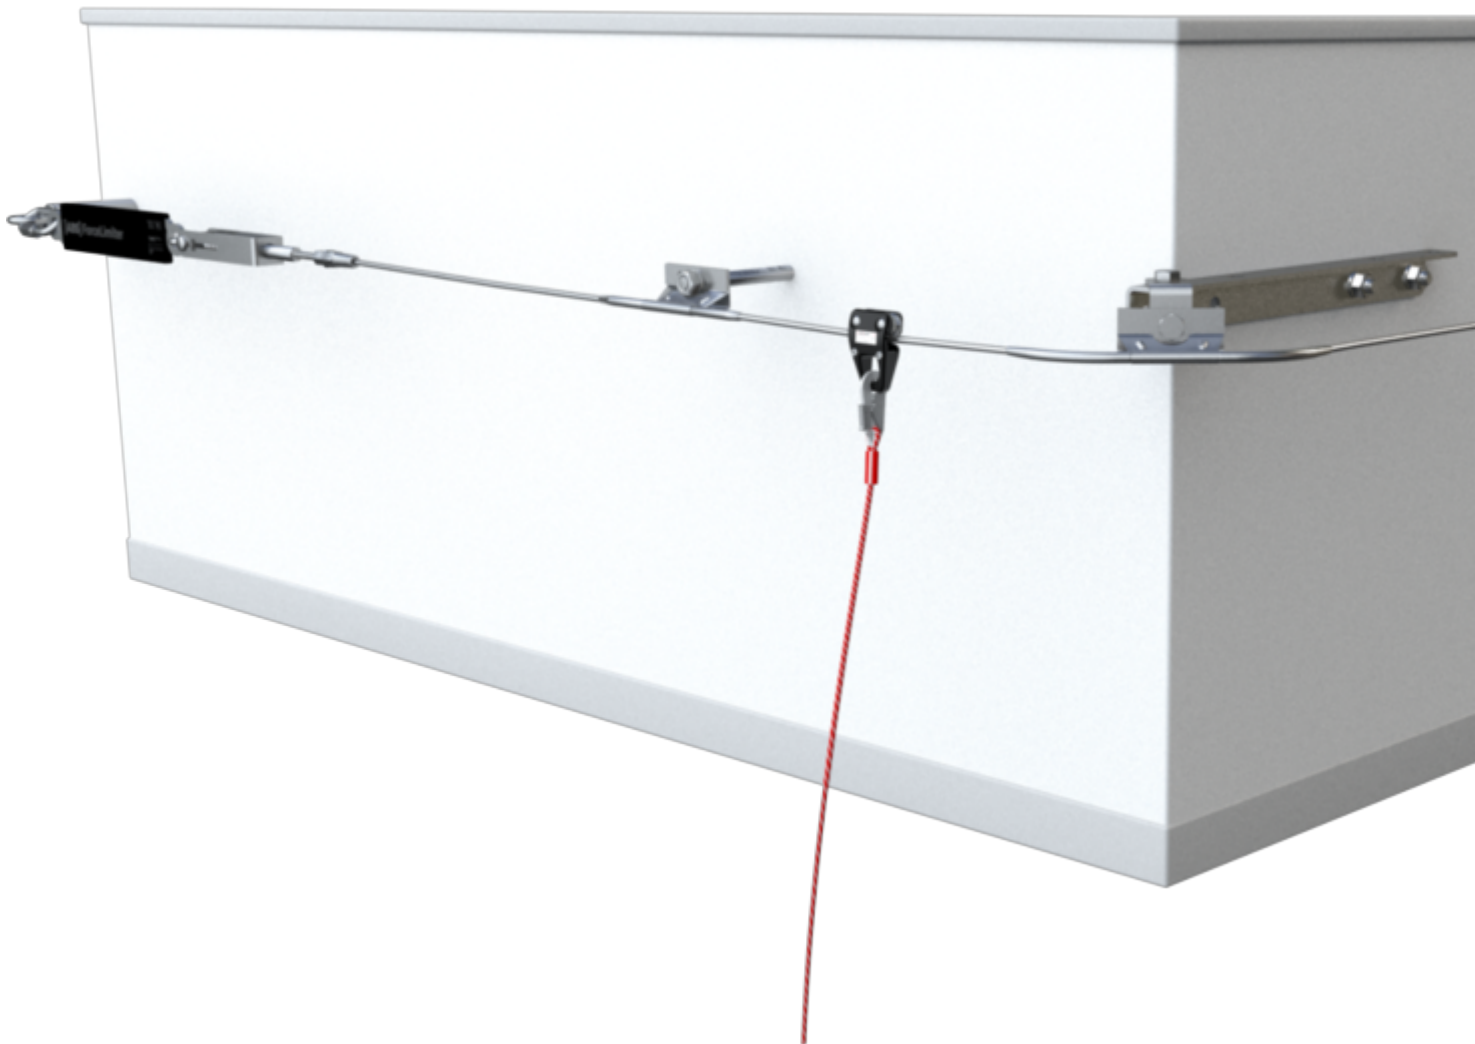

Substructure

Steel Ripped Ceiling / Hollow Core
Wood Concrete

Application

Facade/ Wall

Certification

DIN EN 795 DIBt Approval | Ü-Sign

ABS-Lock SYS

SYS 8mm SYS 6mm

Force Directions

Lateral and Axial

Max. no. of users

4 Persons

- National technical approval ("abZ"): Z-14.9-786
(pls. observe the installation instructions provided in the "abZ")
- EN 795:2012, C & CEN/TS 16415:2013
- Compatible with most ABS Safety system supports
- Suitable for Installation on virtually any surface
- Designed for facades, crane ways, filling plants, industrial, bus, plane and maintenance halls etc.
- Simultaneous protection for up to 4 individuals
- 8 or 6 mm stainless steel cable (V4A)
 - Variant 6mm optionally available in red



