

ABS-Lock X-H-14+2

Anchorage point - designed for screwing onto wooden panelling and beams



Our ABS-Lock X-H-14+2 single anchorage point for wooden panels with a depth of 24 mm and upwards can be used by up to 3 individuals as a retention or arresting system. This anchor was specially designed to buckle under a lateral load and is installed on the floor. The main anchor component is a rod (Ø 16 mm) which buckles when subjected to the force of a fall in order to reduce the leverage effect. As a result, the force actually exerted on the subsurface is minimal and can be easily absorbed.

Our ABS-Lock X-H-14+2 anchor is installed using 16 stainless steel screws: The 14 shorter screws are screwed into the wooden panelling. The two longer screws need to be screwed into a load-bearing beam. Add one of our special ABS-Lock X supporting tubes to upgrade your anchor for use in a lifeline system.

During roof work, your workers can attach themselves securely to the anchorage point using suitable personal fall protection equipment (first and foremost through the use of a safety harness combined with a self-retracting lifeline). If you want to find out which is the best choice of equipment for your own needs, then please contact us. Click here for a list of ABS contacts.

Substructure

Wood

Application

Flat Roofs

Attachment

screwed

Certification

EN 795 DIBt Approval | Ü-Sign
ETA Assessment

ABS-Lock SYS

HLL Intermediate End and corner support

Force Directions

Lateral

Max. no. of users


3 Persons

Miscellaneous

Stainless Steel

- National technical approval ("abZ"): Z-14.9-688 (pls. observe the installation instructions provided in the "abZ")
- EN 795:2012, A + CEN/TS 16415:2017
- abZ: Wood min. 24mm
- EN 795: Wood min. 24mm
- Incl. installation set
- Add a supporting tube for usage as an end or corner post in a lifeline system



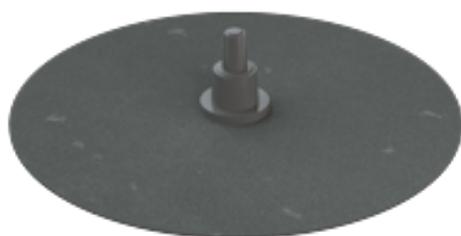

ABS-LockSeal Bitu & Bitu-S

Sealant collar for fall protection anchors installed on a bitumen roof surface (Ø 16, 24, 42 mm)

ABS-LockSeal Plastic

Sealant collar for anchorage points (Ø 16, 24 and 42 mm) - specially designed for PVC, PP and PE roof surfaces



ABS Therm & ABS Signal

Thermal protective cover & signal rod for fall protection anchors



ABS-Lock X Supporting Tube

Stainless steel reinforcement for ABS-Lock X anchorage points



Gewerbering 3 · D-47623 Kevelaer
ABS Safety GmbH



fon: +49 2832 – 97281-0
fax: +49 2832 – 97281-29



info@absturzschutz.de
www.absturzschutz.de