ABS-Lock X-T-21

Anchorage point for installation on a warm roof using toggle bolts

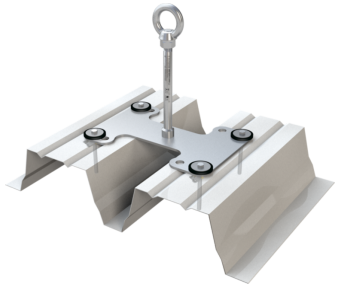

Our ABS-Lock X-T-21 considerably reduces the amount of effort required to install your fall arrest system. This anchor comes with 4 specially prepared toggle bolts which are simply inserted one by one through the holes in the base plate (290 x 200 mm). This fall arrest device for warm roofs provides 3 individuals with a reliable anchorage option and doubles up as a retention and fall arrest system.

The ABS-Lock X-T-21 anchorage eyelet - manufactured completely from stainless steel - can also be deployed as an intermediate post in a lifeline system. To use this device as an end terminal or corner element, simply reinforce it with a matching supporting tube.

Our stainless steel anchorage point sits on top of a rod (Ø 16 mm) designed to buckle under stress. It is suitable for both positive and negative trapezoidal sheeting systems. The system has been tested for lateral loads and was specially devised for warm roofs. Use this anchorage point in combination with our matching personal fall protection equipment (PPE).

- National technical approval ("abZ"): Z-14.9-688
  (pls. observe the installation instructions provided in the "abZ")
- EN 795, A CEN/TS 16415
- Trapezoidal sheeting, steel ≥ 0.63 mm
- Warm roofs, distance between the bores: 180 to 250 mm
- incl. specially prepared toggle bolts
- Add a supporting tube for usage as an end or corner post in a lifeline system

Gewerbering 3 · D-47623 Kevelaer
ABS Safety GmbH

fon: 49 2832 – 97281-0
fax: 49 2832 – 97281-29

info@absturzsicherung.de
www.absturzsicherung.de

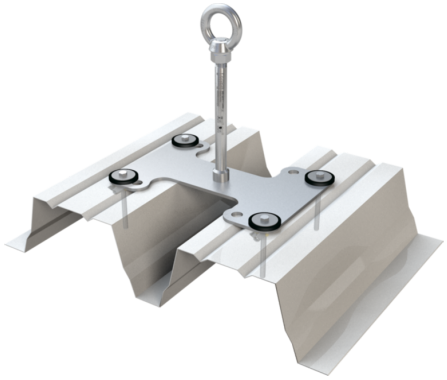

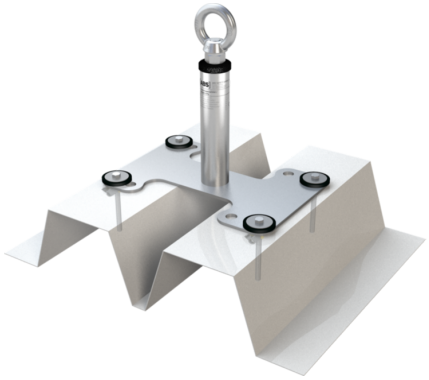

Gewerbering 3 · D-47623 Kevelaer
ABS Safety GmbH

fon: 49 2832 – 97281-0
fax: 49 2832 – 97281-29

info@absturzsicherung.de
www.absturzsicherung.de