

ABS Guard OnTop Weight

Guard rail system - secured using weights



Our ABS Guard OnTop Weight guard rail system is designed for penetration-free installation on flat roofs with an inclination of up to 10°. The system is counterweighted using weights. This high-quality guard rail is made from weatherproof aluminium and comes with straight posts. There is a large selection of connecting and terminating elements to choose from - allowing you to install a tailor-made collective protection solution. Thanks to the flexible angular elements, you can easily adapt your railing to the course of the roof, even around almost any corner.

Substructure

Bitumen / Plastic Membrane Concrete

Attachment

ballasted

Application

Flat Roofs Guardrail systems

Miscellaneous

Additional Shipping Costs

No parapet? No problem! We also offer an optional toeboard for our guard rail systems. This can be used in zones that do not have a parapet or appropriate edge protection. Our roof guard rail system can also be fitted with a special ABS Guard OnTop Gate element. This provides easy access to the secured area.

You need very few tools to be able to install this roof guard rail system. The knee and handrails can be shortened using a tube cutter in a matter of minutes and are fixed in place using practical plastic clamp covers. No additional drilling is required. Our package also includes special fleece material that can be placed underneath the weights to protect the roof membrane.

- EN 13374:2013, A
- Suitable for roof pitches of up to 10°
- Distance between the posts: Max. 2.50 m
- Plastic weights
760 x 800 mm (2 x 25 kg); Weight of the system per m: 30.25 kg
- Concrete weights
280 x 790 mm (2 x 29 kg); Weight of the system per m: 34.64 kg
- Incl. special fleece material for surface protection




Gewerbering 3 · D-47623 Kevelaer
ABS Safety GmbH



fon: +49 2832 – 97281-0
fax: +49 2832 – 97281-29




info@absturzicherung.de
www.absturzicherung.de

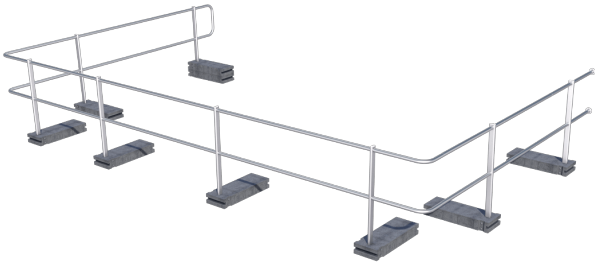

Seilenschutzsysteme zur
kollektiven
Abturrzsicherung nach
DIN EN 13374:2013
Klasse A

- ▶ Maßhaltigkeit
- ▶ Form- und
Positionenbeständigkeit
- ▶ Festigkeit

www.dekra-siegel.de

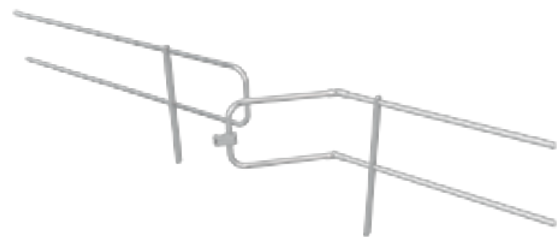

ABS Guard OnTop Weight Access Set
Step safely off your ladder onto a flat roof surface

ABS Guard OnTop Gate
Gate element for our ABS Guard OnTop guard rail systems



ABS Guard Toeboard

Toeboard for ABS Guard OnTop guard rail systems



Gewerbering 3 · D-47623 Kevelaer
ABS Safety GmbH



fon: +49 2832 – 97281-0
fax: +49 2832 – 97281-29



info@absturzschutz.de
www.absturzschutz.de