

(1) CERTIFICATE

- (2) No. of the Certificate: **ZP/B093/17** replaces ZP/B005/14 R1
- (3) Product: **Anchor device type A
Type: ABS-Lock® LOOP**
- (4) Manufacturer: **ABS Safety GmbH**
- (5) Address: **Gewerbering 3, 47623 Kevelaer, Germany**
- (6) The design of this product and any acceptable variation thereto are specified in the appendix to this certificate.
- (7) The Certification Body of DEKRA EXAM GmbH certifies that this product comply with the requirements of the test regulations listed under item 8 below. The test results are recorded in test report PB 17-062.
- (8) The requirements are assured by compliance with
DIN EN 795:2012 **DIN CEN/TS 16415:2013**
- (9) This certificate relates only to the design and tests of the specified product in accordance to the contemplated requirements. Further requirements applied to the manufacturing process and supply of this product, are not covered by this certificate.
- (10) The manufacturer is authorised to apply the mark of conformity to the products that conform to the types examined.
- (11) This certificate is valid until 2022-04-17.



DEKRA EXAM GmbH
Bochum, 2017-04-18

Signed: Wiegand
Certification Body

Signed: Mühlenbruch
Special services unit

We confirm the correctness of the translation from the German original.
In the case of arbitration only the German wording shall be valid and binding.

Wiegand
Certification body

Mühlenbruch
Special services unit

TRANSLATION

- (12) Appendix to
- (13) **Certificate**
ZP/B093/17 replaces ZP/B005/14 R1
- (14) 14.1 Subject and type
Anchor device type A
Type: ABS-Lock[®] LOOP

14.2 Description

The anchor device type: ABS-Lock[®] LOOP (Fig. 1) secures up to 3 persons against fall from a height. The anchor device is made of a corrosion-resistant steel wire rope of Ø 5 mm diameter and its total length is 504 mm. Both ends of the wire rope are pressed into loops (Fig. 4). One loop is fastened to the building structure and is 142 mm long.

The user's personal protective equipment against fall from a height can be attached to the other loop (123 mm long).

The anchor device is mounted to the building structure by the larger one of the two loops and a fastening strap (80.0 mm 32.0 mm x 4.4 mm) as shown in figure 2. The fastening elements are chosen as required for the surface of the building structure.

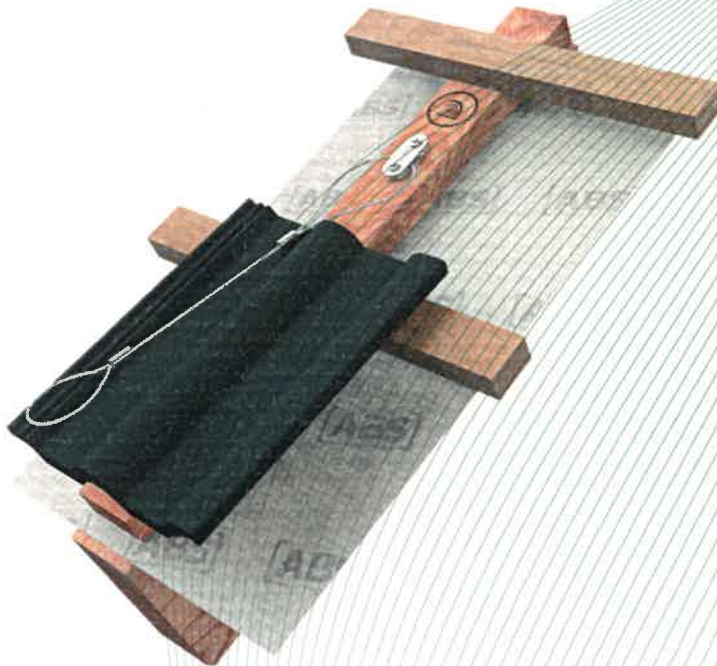


Fig. 1: Anchor device, type: ABS-Lock[®] LOOP



Fig. 2: Fastening strap

- (15) Test Report

PB 17-062 dd. 2017-04-18